


Spare Parts



Holders (Right Hand)

Above figures show right hand tools.

Cat. No.	Stock	Dimensions (mm)						Applicable Insert	Fig.	Screw	Spanner
		h	b	L ₁	f	h ₁	L ₂				
SCT R1010	●	10	10	120	10	10	15	CT R05○○○○(-NB) CT R12○○○○(-NB)	1	BFTX0410T8L	TRX08
SCT R1212	●	12	12	120	12	12	15				
SCT R1616	●	16	16	120	16	16	15	CT R16○○○○(-NB)	2	BFTX0410T8R	TRX08
SCT R1010-16	●	10	10	120	10	10	18				
SCT R1212-16	●	12	12	120	12	12	18	CT R16○○○○(-NB)	1	BFTX0410T8R	TRX08
SCT R1616-16	●	16	16	120	16	16	18				


Holders (Left Hand)

Cat. No.	Stock	Dimensions (mm)						Applicable Insert	Fig.	Screw	Spanner
		h	b	L ₁	f	h ₁	L ₂				
SCT L1010	●	10	10	120	10	10	15	CT L05○○○○(-NB) CT L12○○○○(-NB)	1	BFTX0410T8R	TRX08
SCT L1212	●	12	12	120	12	12	15				
SCT L1616	●	16	16	120	16	16	15	CT L16○○○○(-NB)	2	BFTX0410T8R	TRX08
SCT L1010-16	●	10	10	120	10	10	18				
SCT L1212-16	●	12	12	120	12	12	18	CT L16○○○○(-NB)	1	BFTX0410T8R	TRX08
SCT L1616-16	●	16	16	120	16	16	18				

Characteristics

- **New clamping system**
New clamping system makes it possible to change corners by only loosening the screw from the back.
- **High quality surface finish**
Excellent chip removal with good surface finish even at the centre of the end face.
- **Stable and long tool life**
PVD-coated grade AC530U provides stability and longer tool life.

Design

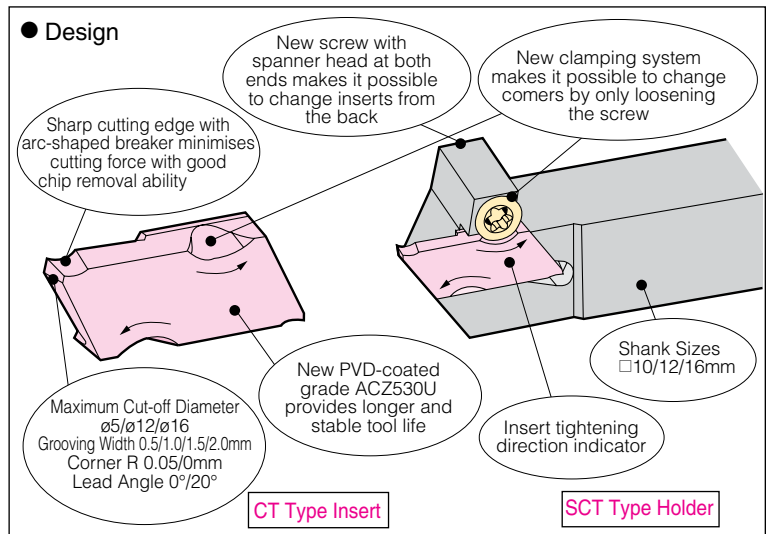

Comparison Test

