
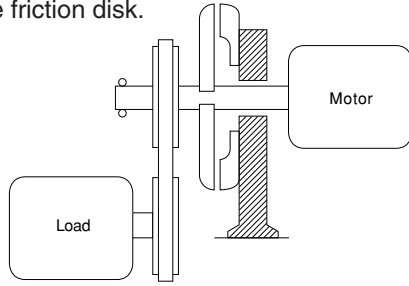




Warner Brakes (with Replaceable Friction Disk), RF Series

High braking torque. Distinguished durability. Replaceable friction disk.









Warner Brakes (with Integrated Field-Friction Disk), PB Series

Integrated field-friction disk. Easily-mounted, universal, low-cost type.

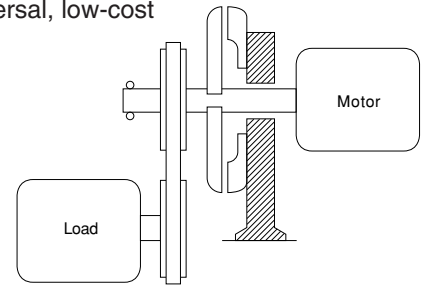

Warner Brakes, RF Series



Model	Drawing number	Static friction torque (kgm)	Rated voltage (DC-V)	Power consumption at 75°C (W)	Outside dimensions (mm)			Weight (kg)
					D	L	φ d	
RF 160/FMS	(A)	0.1	12	6	44.5	34.5	6.5	0.20
RF 250/FMS	(A)	0.7	24	7	67	50	12	0.67
RF 400/FMS	(A)	2.8	24	8	108	59.2	18	2.0
RF 825/IMS	(B)	18	24	25	218	81.3	28	9.0
RF 825/IMP	(C)	18	24	25	218	104	28	11
RF 1000/IMS	(B)	35	24	31	262	110.1	48	16
RF 1000/IMP	(C)	35	24	31	262	112.7	48	15
RF 1225/IMS	(B)	65	24	27	322.5	121.4	50	25
RF 1225/IMP	(C)	65	24	27	322.5	151.6	50	30
RF 1525/IMS	(B)	100	24	32	398	121.4	50	33
RF 1525/IMP	(C)	100	24	32	398	126.2	50	39
RF 1525HT/IMS	(B)	180	24	143	400.8	119.2	75	38

Warner Brakes, PB Series

Model	Drawing number	Static friction torque (kgm)	Rated voltage (DC-V)	Power consumption at 75°C (W)	Outside dimensions (mm)			Weight (kg)
					D	L	φ d	
PB 175/FMS	(A)	0.1	12	7.7	44.8	34.5	6.5	0.20
PB 260/FMS	(A)	0.7	24	9.7	68	50	12	0.55
PB 400/FMS	(A)	2.8	24	8	102	52	18	1.3
PB 500/IMP	(F)	5.5	24	21	128.6	74	28	2.7
PB 501/IMS	(D)	5.5	24	21	133.6	64.4	28	2.6
PB 650/IMS	(D)	13	24	21	165	57.4	28	4.7
PB 650/IMP	(F)	13	24	21	165	71	28	5.0
PB 825/IMS	(D)	18	24	30	218	69.9	28	6.9
PB 825/IMP	(E)	18	24	30	218	92.6	28	7.3
PB 1000/IMS	(D)	35	24	27	262	97.7	48	12
PB 1000/IMP	(E)	35	24	27	262	100.3	48	11
PB 1225/IMS	(D)	65	24	22	322.5	104.2	50	19
PB 1225/IMP	(E)	65	24	22	322.5	134.4	50	20
PB 1525/IMS	(D)	100	24	25	398	107.4	50	26
PB 1525/IMP	(E)	100	24	25	398	112.2	50	27