


**SUS FBN Stainless Steel Finished Bore Sprocket  
D10 K4×1.8 Specification**  
**SUS FBN Stainless Steel Finished Bore Sprocket  
New JIS Keyway Specification**

**SUSFBN35B** 

● Order No. Example



**SUSFBN35B 17 D12**



- Chain ..... No.35
- Chain Pitch ..... (P)9.525mm
- Bushing Link Inner Width... (W)4.78 mm
- Bushing Outside Diameter... (Dr)5.08 mm
- Tooth Width ..... (T)4.3 mm

● Order No. Example

**SUSFBN35B 17 D10 K4**

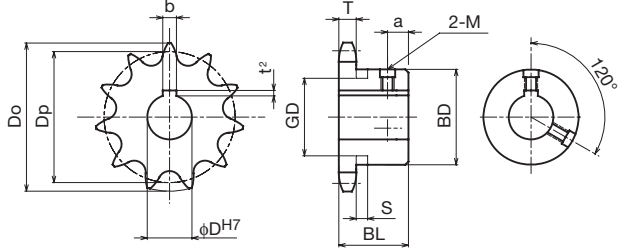

 Stainless Steel  GB304

Type	No. of Teeth	φDH7		Outer Diameter Do	Pitch Diameter Dp	Boss Diameter BD	Boss Length BL	a	Weight kg	¥
SUS FBN 35B	10	10	12	34	30.82	★24.5	20	6	0.08	
	11	10	12	38	33.81	★27	20	6	0.09	
	12	10	12 15	41	36.80	★30.5	20	6	0.12	
	13	10	12 15 16	44	39.80	★32	20	6	0.12	
	14	10	12 15 16	47	42.81	32	20	6	0.12	
	15	10	12 15 16	51	45.81	35	20	6	0.16	
	16	10	12 15 16 18 20	54	48.82	37	20	6	0.19	
	17	12	15 16 18 20	57	51.84	41	20	6	0.22	
	18	12	15 16 18 20	60	54.85	44	20	6	0.25	
	20	12	15 16 18 20	66	60.89	50	20	6	0.32	
	21	12	15 16 18 20	69	63.91	53	20	6	0.36	
	22	12	15 16 18 20	72	66.93	56	20	6	0.37	
	23	12	15 16 18 20	75	69.95	60	20	6	0.38	
	24	12	15 16 18 20 22 25	78	72.97	53	22	8	0.43	
	30	15	16 18 20 22 25	96	91.12	53	22	8	0.51	
	32	15	16 18 20 22 25	102	97.18	53	22	8	0.54	
40	18	20 22 25 30	127	121.40	63	25	10	0.85		

**Shaft Hole Machined Specification**

φDH7	Keyway bxt2	Set Screw M
10	3 x 1.4	4
12	4 x 1.8	5
14 - 17	5 x 2.3	6
18 - 22	6 x 2.8	6
24 - 30	8 x 3.3	8

! Sprockets with a ★ symbol for BD have a channel in the boss outer.

No. of Teeth	S	GD
9		17
10	4.4	20
11	4.4	23
12	4.4	26
13	4.4	29

☆ Special Shaft Hole Machined Specification

φDH7	Keyway bxt2	Set Screw M
10	4 x 1.8	4

\* Only the  parts can be selected for special shaft hole machining. \* For your order method, please refer to the information on the right.



Sprocket No.  and Quantity

Order Method

Sprocket No.   and Quantity



Postage

Same-day shipping



Guide

\* Since we also manufacture sizes other than those in the catalog, and machine shaft holes/keys/taps, etc., depending on your request, please contact our company's sales office for details.



Precautions

\* If you order a special shaft diameter specification, please append K4 after the hole diameter. Example: SUSFBN35B12D10K4